


# Procedures of Cloning an Existing Remote to RMC-680

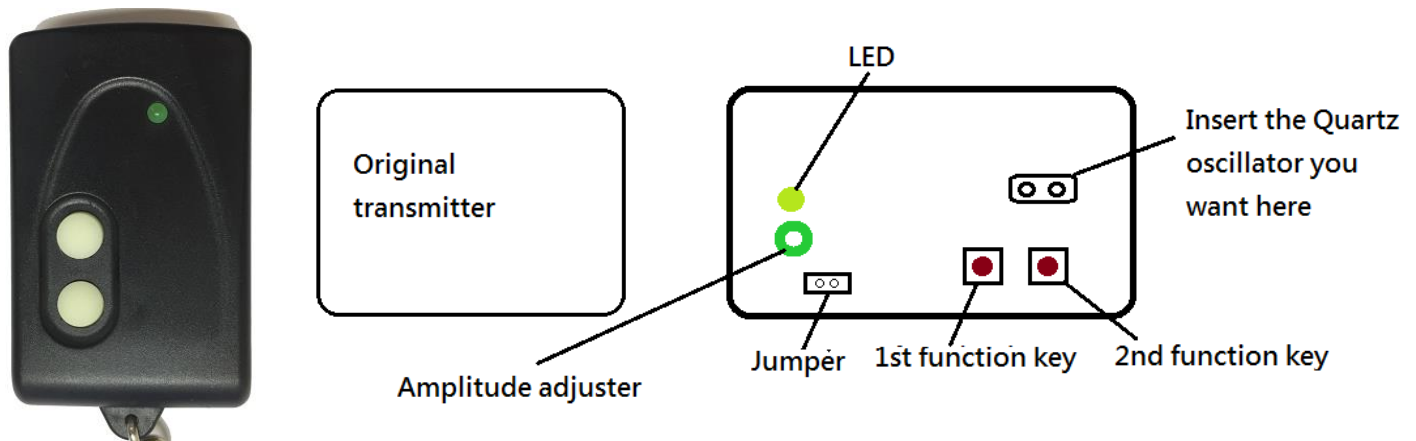

*Note: Please make sure only to program remotes in areas far from electrical interference. Otherwise, the remote may program incorrectly.*

- Step 1. If the RMC-680 is supplied with Quartz Oscillator, please go to step 2;  
If the RMC-680 is supplied without Quartz Oscillator, please insert the Quartz Oscillator with right frequency you want.
- Step 2. Place the REMOCON remote and existing remote within 1 cm of each other.  
Press and hold the button of the existing remote that you want to copy from and press and hold the button of REMOCON remote that you want to copy to;  
adjust the amplitude until the LED of REMOCON remote flashes 3 times.
- Step 3. Still hold the buttons and increase the distance of both remotes to about 2~3 cm apart and observe the brightness of LED of REMOCON remote. Adjust the amplitude until the LED show maximum brightness.
- Step 4. Remove jumper and place it in a way that only one leg is connected. (This can prevent you from losing your jumper next time you want to program the remote.)

Please see our demonstration here: <https://youtu.be/Uv7momVu52s>